



# POSITAL

## FRABA


### IXARC Absolute Rotary Encoder

UCD-AV003-0013-V8S0-2RW



#### Interface

Interface	Analog Voltage
Manual Functions	Start and End point via Cable or Connector
Video Manual	<a href="#">▶ Watch a simple installation video</a>

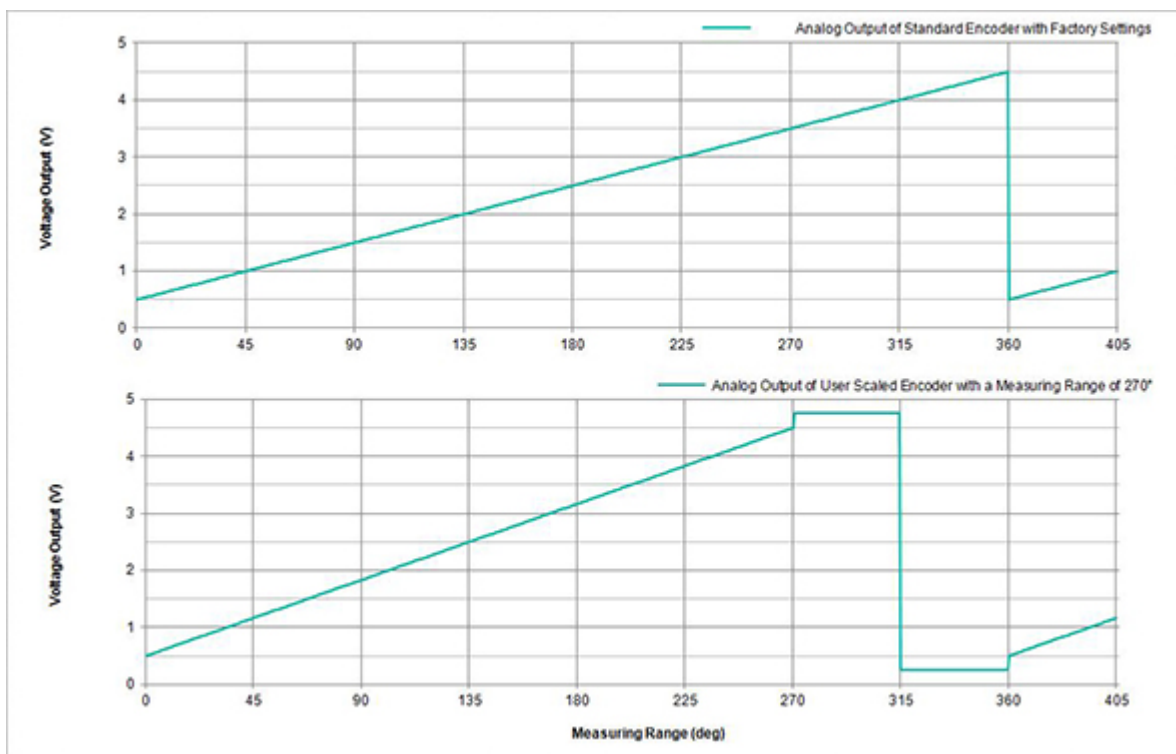

Data Sheet

Printed at 30-04-2020 08:04



# POSITAL

## FRABA

### Electrical Data

Supply Voltage	8 - 32 VDC
Current Consumption	Typical 15 mA @24V (no load)
Start-Up Time	<500 ms
Min. Load Resistance	5 kΩ
Analog Accuracy	@ 10 V = ±10 mV (with an ideal power supply)
Linearity	0.15%
Settling Time	32 ms (from min value to max value jump)
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2
MTTF	300.9 years @ 40 °C

### Sensor

Technology	Magnetic
Resolution Singleturn	13 bit
Accuracy (INL)	±0.0878° (≤ 12 bit)
Sense Signal (Default)	Counterclockwise shaft movement (front view on shaft)
Code	Analog Voltage 0.5 - 4.5 V
Cycle Time Base Sensor	< 100 μs
Minimum Measurement Range	0 - 22.5°
Resolution of Output	Max. 13 bits over entire measuring range (Fractional Turns - Resolution decreases less than 13 bits when measurements range is less than 90 degrees)
Multiturn Range	Singleturn

### Environmental Specifications

Protection Class (Shaft)	IP65
Protection Class (Housing)	IP65
Operating Temperature	-30 °C fixed (-22 °F), -5 °C flexible (+23 °F) - +80 °C (+176 °F)
Humidity	98% RH, no condensation

### Mechanical Data

Housing Material	Steel
------------------	-------

Data Sheet

Printed at 30-04-2020 08:04



# POSITAL

## FRABA

Housing Coating	Cathodic corrosion protection (>720 hrs salt spray resistance)
Flange Type	Blind Hollow, $\varnothing$ 36 mm / $\varnothing$ 42 mm
Flange Material	Aluminum
Shaft Type	Blind Hollow, Depth = 18 mm
Shaft Diameter	$\varnothing$ 8 mm (0.31")
Shaft Material	Stainless Steel V2A (1.4305, 303)
Friction Torque	$\leq$ 3 Ncm @ 20 °C (4.2 oz-in @ 68 °F)
Max. Permissible Mechanical Speed	$\leq$ 12000 1/min
Shock Resistance	$\leq$ 100 g (half sine 6 ms, EN 60068-2-27)
Permanent Shock Resistance	$\leq$ 10 g (half sine 16 ms, EN 60068-2-29)
Vibration Resistance	$\leq$ 10 g (10 Hz - 1000 Hz, EN 60068-2-6)
Length	50,2 mm (1.98")
Weight	290 g (0.64 lb)
Maximum Axial / Radial Misalignment	Static $\pm$ 0.3 mm / $\pm$ 0.5 mm; Dynamic $\pm$ 0.1 mm / $\pm$ 0.2 mm

### Electrical Connection

Connection Orientation	Radial
Cable Length	2 m [79"]
Wire Cross Section	0.14 mm <sup>2</sup> / AWG 26
Material / Type	PVC
Cable Diameter	6 mm (0.24 in)
Minimum Bend Radius	46 mm (1.81") fixed, 61 mm (2.4") flexing

### Certification

Approval	CE + cULus
Product Life Cycle	Established

### Connection Plan

SIGNAL	CABLE COLOR
Power Supply	Red
GND	Yellow
Analog Output	Green
Set1/Direction	Brown
Set2/Zero Set	White
Shielding	Shield



# POSITAL

---

## FRABA

### Connector-View on Encoder **Dimensional Drawing**

[2D Drawing](#)

#### **Accessories**

Clamping Rings

Clamping Ring V12

Displays

AP22-D0 Analog Display (4 dig. o/p)

DiMod-A Analog Display

#### **Contact**



Contact Us

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings.  
All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions.  
Specifications are subject to change without notice.