

# CAN-IB600/PCIe



The Ixxat CAN-IB600/PCIe is an active PCI Express interface card with two CAN/CAN FD channels and galvanic isolation. It is an easy and cost-efficient way to connect computers to a CAN and CAN FD bus network.

The card has a modular design and can be expanded by additional modules which gives highest flexibility for future requirements.

Galvanic isolation reliably enhances the protection of the device against damage to electronics caused by voltage peaks.

## FEATURES AND BENEFITS



- Active CAN FD interface card with powerful 32 bit microcontroller
- Easy expandable via field bus expansion board for switchable CAN low-speed or LIN channels
- 2 x CAN channels (CAN high-speed or CAN FD)
- Single Lane (x1) PCI Express Interface
- Galvanic isolation
- Common driver interface for easy exchange of the PC interface type
- Powerful programming interface for Windows (VCI) as well as for Linux (socketCAN or ECI), QNX and VxWorks (ECI)

<b>ORDER NUMBER</b>	<b>1.01.0233.22010</b>
CAN FD/CAN channels	2
CAN bus interface	2 x D-Sub 9, CiA standard pinning according to CiA 303-1
CAN bit rates	10 kbit/s to 1 Mbit/s (high-speed), 10 kbit/s to 125 kbit/s (low-speed, via optional fieldbus expansion)
CAN FD bit rates	Arbitration rate: up to 1000 kbit/s, data rate: up to 8000 kbit/s (verified by testing). User defined bit rates are possible.
CAN bus termination resistors	None
CAN controller	Internal; CAN 2.0 A/B
CAN high-speed transceiver	SN65HVD251
CAN low-speed transceiver	TJA1054, via optional fieldbus expansion
Galvanic isolation	1 kV DC for 1 sec.
CAN propagation delay (typical)	With galvanic isolation typical 6 ns, max. 10 ns
LIN transceiver	TJA1020T, via optional fieldbus expansion
PC bus interface	PCI express (V1.1), single lane port (x1)

<b>ORDER NUMBER</b>	<b>1.01.0233.22010</b>
PC address range/interrupts	Plug & Play
Microcontroller	32 bit
Power supply	Via PCIe socket (3.3 V DC)
Power consumption	Typ. 400 mA
Dimensions	68.9 x 105 mm
Weight	Approx. 55 g
Operating temperature	0 °C to +70 °C
Storage temperature	-40 °C to +85 °C
Relative humidity	10 to 95 %, non-condensing
Certification	CE, FCC
Operating systems	Windows 11, Windows 10 (32/64), Windows 8 (32/64), Windows 7 (32/64), Linux



ACCESSORIES	ORDER NUMBER
Termination adapter for CAN/CAN FD (D-Sub plug to socket)	1.04.0075.03000
CAN cable 2.0 m (D-Sub plug to socket)	1.04.0076.00180
CAN Y cable 0.22 m	1.04.0076.00001
CAN Y cable 2.1 m	1.04.0076.00002

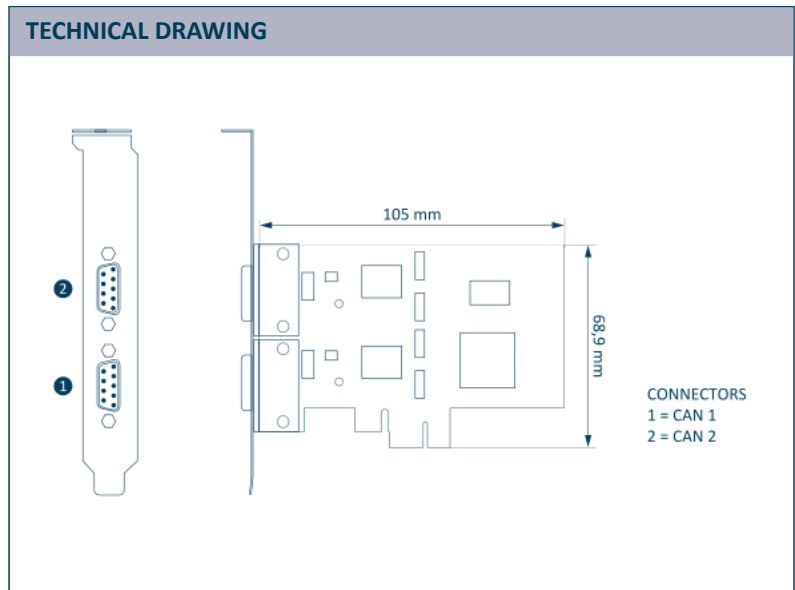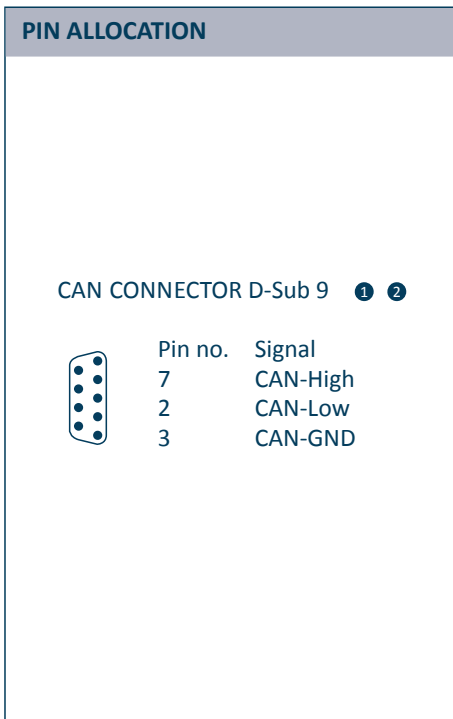

## SOFTWARE SUPPORT

### **Drivers and programming interfaces**

Comprehensive and powerful driver and software packages for the CAN-IB600/PCIe series are available for free at [ixxat.com/support](http://ixxat.com/support). The driver packages can be downloaded for Windows (VCI - Virtual Communication Interface) and Linux (ECI), and are available on request for various real-time operating systems (INtime, RTX, Vxworks, QNX).

Using the Ixxat driver packages, customers can easily switch between the different PC interfaces offered by HMS. This would allow them to use USB, PCIe, Ethernet or other PC connections without changes to their application. The drivers support all protocols available on the interface with one API, so customers can easily access CAN, CAN FD and LIN simultaneously and get the data with a common time stamp.

### **Software tools**

The software tool canAnalyser3 Mini is included in the VCI V4 download package and enables the first analysis steps and monitoring in CAN networks. Further information about the tools as well as Demo/Trial versions are available on the Ixxat webpage.