



# POSITAL

## FRABA


### IXARC Absolute Rotary Encoder

### UCD-AV003-0013-D10D-PAM



#### Interface

Interface	Analog Voltage
Manual Functions	Start and End point via Cable or Connector
Video Manual	<a href="#">▶ Watch a simple installation video</a>

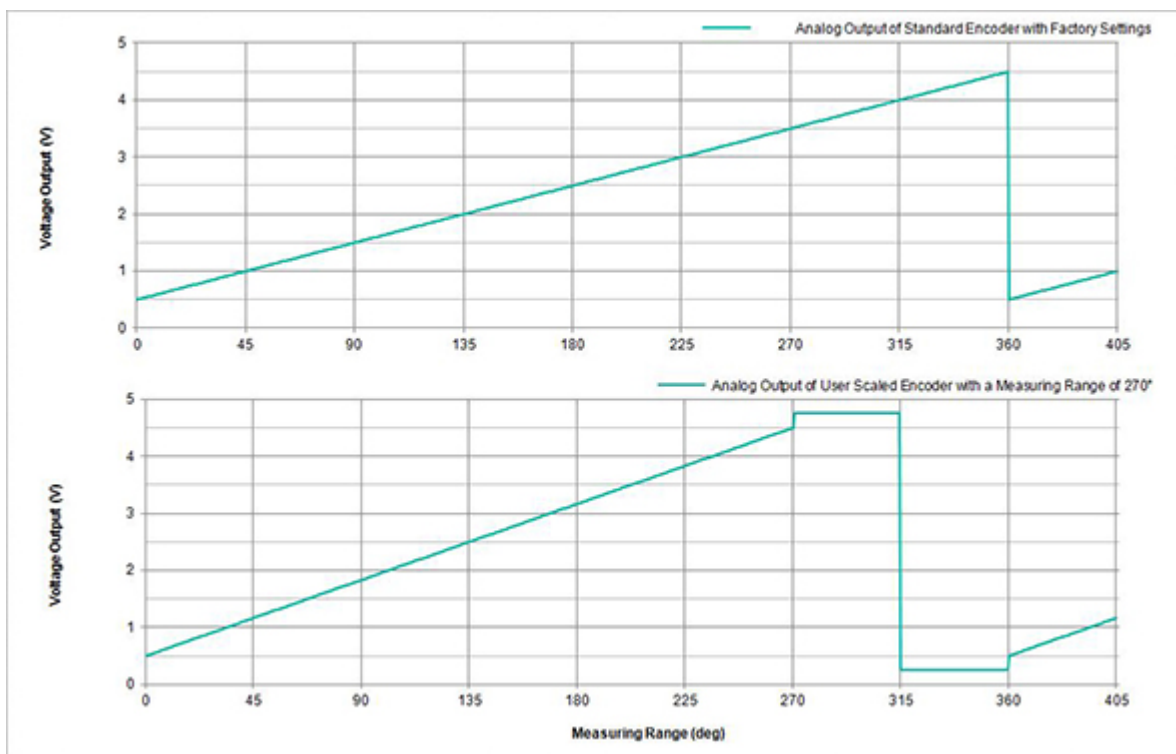

Data Sheet

Printed at 23-04-2020 14:04



# POSITAL

## FRABA

### Electrical Data

Supply Voltage	8 - 32 VDC
Current Consumption	Typical 15 mA @24V (no load)
Start-Up Time	<500 ms
Min. Load Resistance	5 kΩ
Analog Accuracy	@ 10 V = ±10 mV (with an ideal power supply)
Linearity	0.15%
Settling Time	32 ms (from min value to max value jump)
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2
MTTF	300.9 years @ 40 °C

### Sensor

Technology	Magnetic
Resolution Singleturn	13 bit
Accuracy (INL)	±0.0878° (≤ 12 bit)
Sense Signal (Default)	Counterclockwise shaft movement (front view on shaft)
Code	Analog Voltage 0.5 - 4.5 V
Cycle Time Base Sensor	< 100 μs
Minimum Measurement Range	0 - 22.5°
Resolution of Output	Max. 13 bits over entire measuring range (Fractional Turns - Resolution decreases less than 13 bits when measurements range is less than 90 degrees)
Multiturn Range	Singleturn

### Environmental Specifications

Protection Class (Shaft)	IP68/IP69K
Protection Class (Housing)	IP68/IP69K
Operating Temperature	-40 °C (-40 °F) - +85 °C (+185 °F)
Humidity	98% RH, no condensation

### Mechanical Data

Housing Material	Steel
------------------	-------



# POSITAL

## FRABA


Housing Coating	Cathodic corrosion protection (>720 hrs salt spray resistance)
Flange Type	Synchro, ø 36 mm Heavy Duty
Flange Material	Aluminum
Shaft Type	Solid, Length = 20 mm
Shaft Diameter	ø 10 mm (0.39")
Shaft Material	Stainless Steel V4A (1.4112, 440 B), hardened
Max. Shaft Load	Axial 180 N, Radial 180 N
Minimum Mechanical Lifetime (10 <sup>8</sup> revolutions with Fa/Fr)	10 (180 N / 180 N), 15 (150 N,150 N), 30 (100 N / 100 N)
Friction Torque	≤ 5 Ncm @ 20 °C, (7.1 oz-in @ 68 °F)
Max. Permissible Mechanical Speed	≤ 6000 1/min
Shock Resistance	≤ 200 g (half sine 11 ms, EN 60068-2-27)
Permanent Shock Resistance	≤ 30 g (half sine 16 ms, EN 60068-2-29)
Vibration Resistance	≤ 30 g (10 Hz - 1000 Hz, EN 60068-2-6)
Length	56 mm (2.20")
Weight	210 g (0.46 lb)

### Electrical Connection

Connection Orientation	Axial
Connector	M12, Male, 5 pin, a coded

### Certification

Approval	CE + cULus
Product Life Cycle	Established

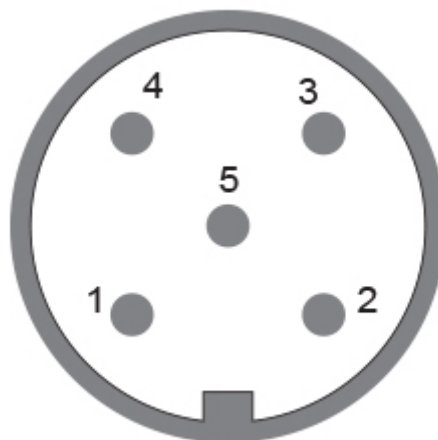



# POSITAL

---

## FRABA

SIGNAL	CONNECTOR	PIN NUMBER
Power Supply	Connector 1	2
GND	Connector 1	3
Analog Output	Connector 1	1
Set1/Direction	Connector 1	5
Set2/Zero Set	Connector 1	4

### Connector-View on Encoder **Dimensional Drawing**

#### [2D Drawing](#)

#### **Accessories**

##### Connectors & Cables

10m PUR Cable, 5pin, A-Coded, f  
POS M12 5pin-A Female+5m PUR Cable  
POS M12 5pin-A Female+2m PUR Cable  
POS M12 5pin-A Female+10m PUR Cable  
M12, 5pin A-Coded, Female  
More

##### Couplings

Coupling Disc Type-10-12  
Coupling Bellow Type-10-10  
Coupling Bellow Type-06-10  
Coupling Bellow Type-08-10  
Coupling Bellow Type-10-12  
Coupling Bellow Type-10-(1/4")  
Coupling Bellow Type-10-(3/8")  
Coupling Jaw Type-06-10  
Coupling Jaw Type-08-10  
Coupling Jaw Type-10-12  
Coupling Jaw Type-10-(1/4")  
Coupling Jaw Type-10-(3/8")  
Coupling Jaw Type-10-10  
Coupling Disc Type-06-10  
Coupling Disc Type-10-10  
More

##### Displays

AP22-D0 Analog Display (4 dig. o/p)  
DiMod-A Analog Display



# POSITAL

---

## FRABA

### Contact



### Contact Us

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.